

ATS21/1600/3N3

MCCS Type Automatic Transfer Switch

Rated Current % 00A Voltage 100~600VAC

Features

- Trouble-free Modular Design
- Easy Service & Maintenance
- ATS-22*PLC Controller with Voltage, Phase Monitoring, 168HR Exerciser & Protections
- PTM-100M* Voltage Transformer Module-Change Voltages Easily Via Plug-In Connector
- BTS*-Transfer Switch Built With High Short Circuit Breaking Capacity & OCPD**MCCBs
- The Modules interconnected by Harness using High Voltage rated Plugs
- Complies with IEC 60947-6 Requirements***



* Pictured: ATS with enclosure, ATS-22, PTM-100M & BTS Switch, for more details, please check brochures & manuals


ATS Rated Operating Current & AC Rated Breaking Capacity

ATS Type	Pole	Rated Current (A) Ambient Temperature 40	AC Rated Breaking Capacity								
			Sym r.m.s(KA)	IEC 60947-2 Icu/lcs	240V	380V	415V	440V	500V	690V	
LX % 00	3 P										

LX % 00 3 P

*For special high breaking capacity requirements, please contact us.

Mechanical Specifications

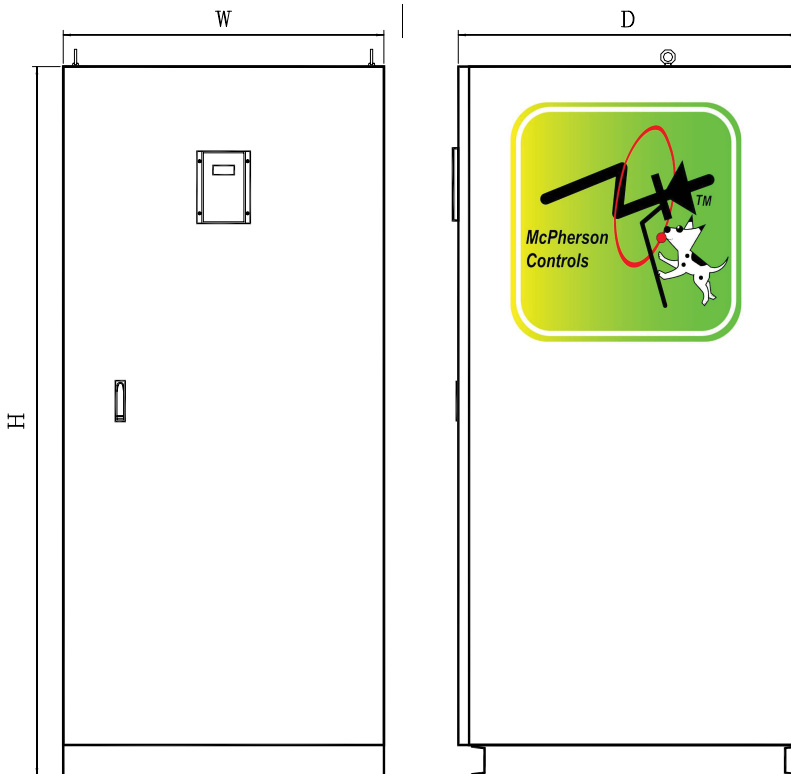

Enclosure P/N.	CA-N1800
H	1800
W	820
D	640
Thickness	2.0
Fixed Type	Floor
MCCS Capacity	3P 500~2000 A
Wire Portal Dimensions	OB*
Outdoor Enclosures	Please contact us if rain-proof (for outdoor use) enclosure is needed.

Note: T & B stands for "2 portals on both Top & Bottom"

**** OCPD :**

Over Current Protection Device

***** IEC60947-6 Class CB :**

ATS provided with over current releases and the main contacts of which are capable of making and are intended for breaking short circuit currents.

***** IEC60947-6 Utilization Category AC-33A :**

1. Frequent Operations
2. Motor loads or mixed loads including motors, resistive loads and up to 30% incandescent lamp

UNIT: mm