

# ATS21/400/3N3

MCCB Type Automatic Transfer Switch  
Rated Current 400A Voltage 100~600VAC

## Features

- UL-1008
- Easy Service & Maintenance
- ATS-21\*PLC Controller with Voltage, Phase Monitoring, 168HR Exerciser & Protections
- PTM-100\* Voltage Transformer Module-Change Voltages Easily Via Plug-In Connector
- BTS\*-Transfer Switch Built With High Short Circuit Breaking Capacity & OCPD\*\*MCCBs
- The Modules interconnected by Harness using High Voltage rated Plugs
- Complies with IEC 60947-6 Requirements\*\*\*

\* Pictured: ATS with enclosure, ATS-21, PTM-100M & BTS Switch, for more details, please check brochures & manuals




## ATS Rated Operating Current & AC Rated Breaking Capacity

ATS Type	Pole	Rated Current (A) Ambient Temperature 40°C				AC Rated Breaking Capacity					
						Sym r.m.s(KA)	IEC 60947-2 Icu/Ics				
		240V	380V	415V	440V	500V	690V				
ATS21/400/3N3 0	3P	250	300	350	400	35	25	25	18	15	-

\*For special high breaking capacity requirements, please contact us.

## Mechanical Specifications

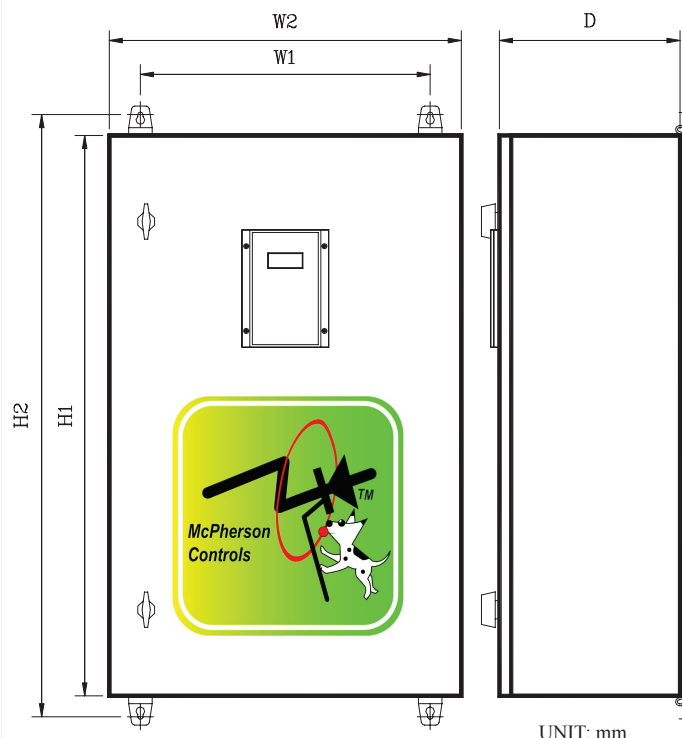

Enclosure P/N.	CA-400
H1	1016
H2	1092
W1	508
W2	609
D	355
Thickness	1.6
Fixed Type	Wall Mountable
MCCB Capacity	3P 250~400 A
Wire Portal	220 x 110 mm
Dimensions	T & B
Outdoor Enclosures	Water Tight Enclosure Standard

Note: T & B stands for "2 portals on both Top & Bottom"

\*\* OCPD :  
Over Current Protection Device

\*\*\* IEC60947-6 Class CB :  
ATS provided with over current releases and the main contacts of which are capable of making and are intended for breaking short circuit currents.

\*\*\* IEC60947-6 Utilization Category AC-33A :

1. Frequent operations
2. Motor loads or mixed loads including motors, resistive loads and up to 30% incandescent lamp