


INDUSTRIAL RANGE

POCKET GUIDE

6 KVA - 4500 KVA | 50 HZ

5 KW - 4000 KW | 60 HZ

MK-PG-IN-DO-EN-211

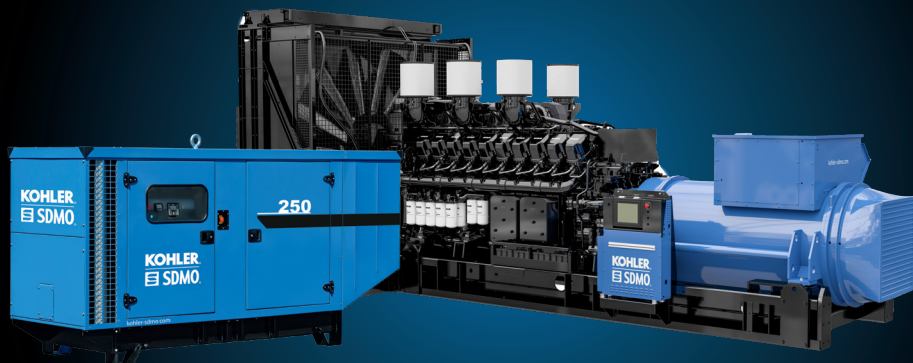

KOHLER[®]
IN POWER. SINCE 1920.

KD-SERIES RANGE - 50 HZ

Power	Genset model	Power (kVA)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions lxxh (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾
1-75 kVA	K6M	5.7	6.3	KDW1003	1.22x0.70x0.92	290	M125	54	390
	K9	8.1	8.9	KDW1003	1.22x0.70x0.92	290	M125	54	390
	K10M	8.2	9	KDW1404	1.41x0.72x1.02	350	M126	54	520
	K12	10.9	12	KDW1404	1.41x0.72x1.02	340	M126	54	510
	K12M	10.7	11.8	KDW1603	1.41x0.72x1.02	440	M126	61	610
	K12C5	10.9	12	KDW1404-EU5	1,41 x 0,72 x 1,01	340	M136	54	510
	K16	15	16.5	KDW1603	1.41x0.72x1.02	410	M126	61	580
	K16H	-	16	KDW1003-H	1,41x0,72x1,02	310	M126	66	480
	K17M	14.1	15.5	KDI1903M	1.41x0.72x1.08	530	M126	58	700
	K16C5	13.3	15	KDW1603-EU5	1,41x0,72x1,01	410	M136	61	580
	K20C5	18.2	20	KDI1903M-EU5	1,41x0,72x1,08	490	M126	58	660
	K21H	-	21	KDW1404-H	1,41x0,72x1,08	350	M126	67	520
	K22	19.5	21.5	KDI1903M	1.41x0.72x1.08	490	M126	58	660
	J22	20	22	3029DSG20	1.70x0.90x1.18	624	M137	63	812
	K26M	23.6	26	KDI2504TM-30	1.70x0.90x1.20	621	M137	64	830
	K27	24.1	26.5	KDI2404M	1.41x0.72x1.08	540	M126	64	710
	K33	30	33	KDI2504TM-30	1.70x0.90x1.20	585	M137	63	773
	J33	30	33	3029DSG20	1.70x0.90x1.18	629	M137	62	817
	K33C3	30	33	KDI2504TM-30-EU	1.70x0.90x1.20	585	M137	63	773
	K44C3	40	44	KDI2504TM-40-EU	1.70x0.90x1.20	618	M137	64	806
J44	40	44	3029TSG20	1.70x0.90x1.24	680	M137	63	868	
K44	40	44	KDI2504TM-40	1.70x0.90x1.20	618	M137	64	806	
J66	60	66	4045TSG20	1.95x1.08x1.45	908	M138	66	1246	
J66C3	60	66	4045HFS85-IND	1,87x0,99x1,36	995	M138	61	1405	
K66	60	66	KDI3404TM	1.70x0.90x1.17	781	M137	66	978	
76-250 kVA	J88	80	88	4045TSG20	1.95x1.08x1.45	980	M138	67	1325
	J110	100	110	4045HSG20	1.95x1.08x1.45	1010	M138	68	1335
	J110C3	100	110	4045HFS87-IND	1.95x1.08x1.45	1020	M138	66	1587
	J130	118	130	4045HSG21	1.95x1.08x1.45	1287	M138	68	1405
	J165	150	165	6068HFG20-153	2.37x1.11x1.48	1578	M139	70	2065
	J165C3	150	165	6068HFS85-IND	2,37x1,11x1,48	1578	M139	64	2168
	J200	182	200	6068HFG20-183	2.37x1.11x1.48	1726	M139	69	2230
	J220	200	220	6068HFG20-202	2.37x1.11x1.54	1715	M139	68	2405
	J220C3	200	220	6068HFS86-IND	2,37x1,11x1,54	1756	M139	66	2471
	J250	227	250	6068HFS55-228	2.40x1.11x1.54	1800	M139	71	2515

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid

KD-SERIES RANGE - 50 HZ

Power	Genset model	Power (kVA)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions lxxw (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾
251-770 kVA	V275C2	250	275	TAD734GE	2.90x1.30x1.59	2200	M227	67	3102
	V350C2	318	350	TAD1341GE-B	3.16x1.34x1.80	3101	M228	67	4035
	V350C2_VDE	318	318	TAD1341GE-B	3.16x1.34x1.80	3103	M228	67	4035
	V400C2	355	390	TAD1342GE-B	3.16x1.34x1.80	3103	M228	67	4035
	V400C2_VDE	355	355	TAD1342GE-B	3.16x1.34x1.80	3160	M228	67	4260
	V440C2	400	440	TAD1344GE-B	3.16x1.34x1.80	3110	M228	68	4080
	V440C2_VDE	400	400	TAD1344GE-B	3.16x1.34x1.80	3210	M228	68	4320
	V500C2	455	500	TAD1345GE-B	3.16x1.34x1.80	3250	M228	68	4360
	V500C2_VDE	455	455	TAD1345GE-B	3.16x1.34x1.80	3380	M228	68	4490
	V550C2	500	550	TAD1641GE-B1	3.47x1.50x2.04	3660	M229	72	4870
	V550C2_VDE	500	500	TAD1641GE-B1	3.47x1.50x2.04	3800	M229	72	5010
	V550C3	500	550	TAD1651GE	3.47x1.63x2.10	3650	M230	71	4870
	V650C2	591	650	TAD1642GE-B	3.47x1.63x2.09	3650	M230	70	5300
	V650C2_VDE	591	591	TAD1642GE-B	3.47x1.63x2.09	3860	M230	70	5380
	V715C2	650	715	TWD1644GE	3.47x1.63x2.05	4060	M230	75	5590
V715C2_VDE	650	650	TWD1644GE	3.47x1.63x2.05	4270	M230	75	5790	
V770C2	700	770	TWD1645GE	3.47x1.63x2.05	4270	M230	75	5790	
V770C2_VDE	700	700	TWD1645GE	3.47x1.63x2.05	4331	M230	75	5851	
800-1500 kVA	KD800 ⁽⁴⁾	727	800	KD27V12	4.19x1.75x2.28	5470	M427SI*	77	8300
	KD900 ⁽⁴⁾	818	900	KD27V12	4.19x1.75x2.28	5910	M427SI*	77	8400
	KD1000 ⁽⁴⁾	909	1000	KD27V12	4.19x1.75x2.28	6040	M427SI*	77	8800
	KD1100 ⁽⁴⁾	1000	1100	KD27V12	4.19x1.75x2.28	6270	M427SI*	78	9000
	KD1250 ⁽⁴⁾	1136	1250	KD36V16	4.67x1.90x2.38	8300	M428SI*	79	11600
	KD1400 ⁽⁴⁾	1291	1420	KD36V16	4.67x1.90x2.38	8600	M428SI*	79	10800
	KD1500 ⁽⁴⁾	1364	1500	KD36V16	4.67x1.90x2.38	8900	M428SI*	79	11100
1501-2800 kVA	KD1650 ⁽⁴⁾	1500	1650	KD45V20	5.09x2.12x2.48	10100	ISO20SI*	88	15900
	KD1800 ⁽⁴⁾	1636	1800	KD45V20	5.09x2.12x2.48	10800	ISO20SI*	88	16500
	KD2000 ⁽⁴⁾	1818	2000	KD62V12	4.74x2.10x2.56**	14938	CPU40SI*	78	29020
	KD2250 ⁽⁴⁾	2045	2250	KD62V12	4.74x2.10x2.56**	15186	CPU40SI*	78	29270
	KD2500 ⁽⁴⁾	2273	2500	KD62V12	4.74x2.10x2.56**	15637	CPU40SI*	78	29730
	KD2800 ⁽⁴⁾	2545	2800	KD62V12	4.74x2.10x2.56**	17045	CPU40SI*	78	30100
> 3000 kVA	KD3100 ⁽⁴⁾	2818	3100	KD83V16	5.32x2.36x2.48**	19750	CPU45SI*	80	TBC
	KD3300 ⁽⁴⁾	3000	3300	KD83V16	5.32x2.36x2.48**	20300	CPU45SI*	80	TBC
	KD3500 ⁽⁴⁾	3182	3500	KD83V16	5.32x2.36x2.48**	20300	CPU45SI*	80	TBC
	KD4000 ⁽⁴⁾	3680	4050	KD103V20	6.69x2.25x2.83	26000	-	-	-
	KD4500 ⁽⁴⁾	4090	4500	KD103V20	6.69x2.25x2.83	26100	-	-	-

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid

(4) exist in Fuel Optimized and Emission Optimized

* exists in other enclosure/container with lower sound level

** Dimensions & weight without cooling system (separate aero cooler)

KD-SERIES RANGE - 60 HZ

Power	Genset model	Power (kW)		Engine	Open version		Enclosure	Enclosed version		
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions l x w x h (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾	
1-60 kW	K9UM	7.3	8	KDW1003	1.22x0.70x0.92	330	M126	64	500	
	K9U	7.6	8.4	KDW1003	1.22x0.70x0.92	290	M125	64	390	
	K12UM	10	11	KDW1404	1.41x0.72x1.02	350	M126	64	520	
	K12U	10.6	11.6	KDW1404	1.41x0.72x1.02	340	M126	64	510	
	K16UM	13.6	15	KDW1603	1.41x0.72x1.02	440	M126	69	610	
	K16U	14.1	15.5	KDW1603	1.41x0.72x1.02	410	M126	69	580	
	K20UM	16.4	18	KDI1903M	1.41x0.72x1.08	530	M126	67	700	
	K20U	17.3	19	KDI1903M	1.41x0.72x1.08	490	M126	67	660	
	J20UM	18.2	20	3029DSG20	1.70x0.90x1.18	624	M137	68	812	
	K30UM	27.3	30	KDI2504TM-30	1.70x0.90x1.20	621	M137	68	830	
	K25U	22.6	24.8	KDI2404M	1.41x0.72x1.08	540	M126	68	710	
	K30U	27.9	30.7	KDI2504TM-30	1.70x0.90x1.20	585	M137	68	773	
	J30UM	25.5	28	3029DSG20	1.70x0.90x1.18	698	M137	68	911	
	J30U	27.6	30.4	3029DSG20	1.70x0.90x1.18	629	M137	68	817	
	J40UM	35.5	39	3029TSG20	1.70x0.90x1.24	694	M137	70	907	
	K40UM	36.4	40	KDI2504TM-40	1.70x0.90x1.07	636	M137	68	824	
	J40U	36	40	3029TSG20	1.70x0.90x1.24	680	M137	70	868	
	K40U	36	40	KDI2504TM-40	1.70x0.90x1.20	618	M137	68	806	
	70-300 kW	J60U	52	58	4045TSG20	1.95x1.08x1.45	908	M138	71	1246
		K60U	52	58	KDI3404TM	1.70x0.90x1.17	781	M137	69	978
J60UM		55	60	4045TSG20	1.95x1.08x1.45	1 015	M138	71	1497	
J80U		73	80	4045TSG20	1.95x1.08x1.45	980	M138	74	1325	
J100U		91	100	4045HSG20	1.95x1.08x1.45	1010	M138	72	1335	
J120U		108	118	4045HSG21	1.95x1.08x1.45	1287	M138	71	1405	
J150U		135	149	6068HFG20-153	2.37x1.11x1.48	1578	M139	70	2065	
J175U		159	175	6068HFG20-183	2.37x1.11x1.48	1726	M139	71	2230	
J210U		191	210	6068HFS55-228	2.40x1.11x1.54	1800	M139	72	2515	
V250U		213	234	TAD734GE	2.90x1.30x1.59	2200	M227	74	3102	
315-640 kW	V300U	273	300	TAD1341GE-B	3.16x1.34x1.80	3101	M228	76	4035	
	V350U	318	350	TAD1342GE-B	3.16x1.34x1.80	3103	M228	76	4035	
	V400U	364	400	TAD1344GE-B	3.16x1.34x1.80	3110	M228	76	4080	
	V500UC2	454	500	TAD1641GE-B1	3.47x1.50x2.04	3660	M229	75	4870	
	V550UC2	500	550	TAD1642GE-B	3.47x1.63x2.09	3650	M230	75	5300	
	V600U	546	600	TWD1644GE	3.47x1.63x2.05	4060	M230	79	5590	
	V640UC2	582	640	TWD1645GE	3.47x1.63x2.05	4270	M230	79	5790	

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid

KD-SERIES RANGE - 60 HZ

Power	Genset model	Power (kW)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions l x w x h (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾
800-1500 kW	KD800U ⁽⁴⁾	727	800	KD27V12	4.19x1.75x2.28	5470	M427SI*	77	8300
	KD900U ⁽⁴⁾	818	900	KD27V12	4.19x1.75x2.28	5910	M427SI*	77	8400
	KD1000U ⁽⁴⁾	909	1000	KD27V12	4.19x1.75x2.28	6040	M427SI*	77	8800
	KD1250U ⁽⁴⁾	1136	1250	KD36V16	4.67x1.90x2.38	8300	M428SI*	79	11600
	KD1350U ⁽⁴⁾	1218	1339	KD36V16	4.67x1.90x2.38	8600	M428SI*	79	10800
	KD1500U ⁽⁴⁾	1364	1500	KD36V16	4.67x1.90x2.38	8900	M428SI*	79	11100
1600-2815 kW	KD1600U ⁽⁴⁾	1454	1600	KD45V20	5.09x2.12x2.48	10100	ISO20SI*	88	15900
	KD1750U ⁽⁴⁾	1591	1750	KD45V20	5.09x2.12x2.48	10800	ISO20SI*	88	16500
	KD2000U ⁽⁴⁾	1818	2000	KD62V12	4.74x2.10x2.56**	14938	CPU40SI*	78	29020
	KD2250U ⁽⁴⁾	2046	2250	KD62V12	4.74x2.10x2.56**	15186	CPU40SI*	78	29270
	KD2500U ⁽⁴⁾	2273	2500	KD62V12	4.74x2.10x2.56**	15637	CPU40SI*	78	29730
	KD2800U ⁽⁴⁾	2558	2814	KD62V12	4.74x2.10x2.56**	17045	CPU40SI*	78	30100
> 3000 kW	KD3000U ⁽⁴⁾	2727	3000	KD83V16	5.32x2.36x2.48**	19750	-	-	-
	KD3250U ⁽⁴⁾	2954	3250	KD83V16	5.32x2.36x2.48**	20300	-	-	-
	KD3500U ⁽⁴⁾	3180	3500	KD103V20	8.13x3.17x3.45	34239	-	-	-
	KD4000U ⁽⁴⁾	3640	4000	KD103V20	8.19x3.17x3.45	35199	-	-	-

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid

(4) exist in Fuel Optimized and Emission Optimized

* exists in other enclosure/container with lower sound level

** Dimensions & weight without cooling system (separate aero cooler)

KD-SERIES Enclosure

Canopy	Dimensions l x w x h (m)
M125	1.48x0.76x1.03
M126	1.75x0.78x1.23
M137	2.10x0.94x1.28
M138	2.57x1.13x1.57
M139	3.59x1.15x1.78
M227	4.00x1.38x2.15
M228	4.48x1.41x2.43
M229	5.03x1.56x2.44
M230	5.03x1.69x2.66
M427SI	6.41x2.16x2.75
M428SI	6.80x2.16x2.75
Container	Dimensions l x w x h (m)
ISO20SI	6.06x2.44x2.90
ISO40SI	12.19x2.44x2.90
CPU40SI	12.19x2.44x2.90
CPU45SI	13.72x2.44x2.90

KD-SERIES Product naming

KOHLER-SDMO	KPS	Engine
K...	KK...	Kohler engine - small diesel
J...	KD...	John Deere engine
V...	KV...	Volvo engine
KD...	KD...	Kohler engine - large diesel

GLOSSARY

...U	60 Hz
...M	Single phase
...H	High speed (3000 RPM)
...C	Clean Power Range
...C3	Clean Power Range - STAGE IIIA
...C5	Clean Power Range - STAGE V
... VDE	Certified for Grid code application - German regulation (VDE-AR-N 4110)

X-SERIES RANGE - 50 HZ

Power	Genset model	Power (kVA)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions l x w x h (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾
1-20 kVA	T9KM	7.8	8.6	S3L2-SD	1.41x0.72x1.05	396	M126	58	544
	T12KM	10.7	11.8	S4L2-SD	1.41x0.72x1.05	406	M126	59	630
	T12K	10.5	11.5	S3L2-SD	1.41x0.72x1.05	387	M126	58	530
	T16K	14.5	1	S4L2-SD	1.41x0.72x1.05	406	M126	59	554
NEW RANGE COMING SOON (20-165 kVA)									
250-330 kVA	D275	250	275	P126TI	2.90x1.30x1.67	2340	M227	73	3190
	D300	273	300	P126TI	2.90x1.30x1.67	2410	M227	73	3260
	D330	300	330	P126TI-II	3.16x1.34x1.59	2570	M228	71	3670
376-830 kVA	D440	400	440	P158LE	3.47x1.50x1.83	2910	M229	75	4090
	D550	500	550	DP158LDF	3.47x1.50x1.82	3220	M229	74	4262
	D630	573	630	DP180LA	3.47x1.63x1.97	3465	M230	78	5146
	D700	634	697	DP180LB	3.47x1.63x2.16	3700	M230	78	5381
	D830	750	825	DP222LC	3.47x1.63x2.18	4080	M230	78	5670

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid



D830 (Open version)



M227 (Soundproofed version)

X-SERIES RANGE - 50 HZ

Power	Genset model	Power (kVA)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions lwxh (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾
800-1500 kVA	B900	800	900	12M26G900_5	4.42x1.74x2.38	7470	M427SI*	77	9700
	B900-50	818	-	12M26G900_5	4.42x1.74x2.38	7470	M427SI*	77	9700
	B1000	909	1000	12M26G1000_5	4.42x1.74x2.38	7700	M427SI*	77	9900
	B1000-50	909	-	12M26G1000_5	4.42x1.74x2.38	7700	M427SI*	77	9900
	B1100	1023	1125	12M26G1100_5	4.42x1.74x2.38	7880	M427SI*	77	10100
	T1250	1136	1250	S12R-PTA-3	4.31x2.00x2.29	10100	M428SI*	80	12430
	B1250	1136	1250	12M33G1250_5	4.80x2.19x2.45	8850	ISO20SI*	82	14640
	B1250-50	1136	-	12M33G1250_5	4.80x2.19x2.45	8850	ISO20SI*	82	14640
	T1400	1275	1403	S12R-PTA-3	4.32x2.00x2.36	10370	M428SI*	80	12700
	B1400	1273	1400	12M33G1400_5	4.80x2.19x2.45	9120	ISO20SI*	82	14910
	B1400-50	1281	-	12M33G1400_5	4.80x2.19x2.45	9120	ISO20SI*	82	14910
1501-2800 kVA	T1540	1400	1540	S12R-PTA2	4.40x2.00x2.36	10680	M428SI*	80	13010
	B1500	?	1500	12M33G1500_5	4.80x2.19x2.45	9430	ISO20SI*	84	15220
	T1650	?	?	S12R-PTAA2	4.98x2.25x2.44	10870	ISO20SI*	89	16300
	T1650C	1500	1640	S12R-F1PTAW2	5.09x2.20x2.39	12041	ISO20SI*	89	16910
	T1900	1727	1900	S16R-Y1PTA-4	5.52x2.29x2.48	12979	ISO40SI*	83	22760
	T2200	2050	2255	S16R-Y1PTAA2-3B	5.79x2.29x2.56	14698	ISO40SI*	84	23090
	T2200C	2000	2200	S16R-F1PTAW2	4.58x1.90x2.40**	12160	CPU40SI*	80	24690
	T2500	2273	2500	S16R2-PTAW	6.70x3.35x2.82	15500	CPU40Si*	82	TBC
	T2500C	2273	2500	S16R2-F1PTAW	6.70x3.35x2.82	15500	CPU40SI*	82	TBC
	T2800	2538	2800	S16R2-PTAW2-E	6.70x3.35x2.82	17000	-	-	-

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.


(3) Dry weight : without fuel & without cooling liquid

* exists in other enclosure/container with lower sound level

** Dimensions & weight without cooling system (separate aero cooler)



B1400 (Open version)

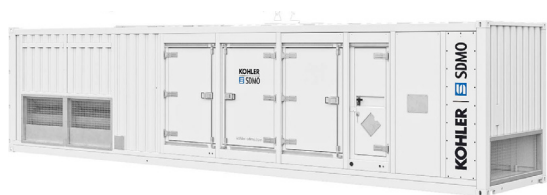

CPU40SI (Soundproofed version)

X-SERIES RANGE - 60 HZ

Power	Genset model	Power (kW)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions l x w x h (m)	Weight (kg) ⁽³⁾		7m	Weight (kg) ⁽³⁾
1-16 kW	T11UM	9.1	10	S3L2-SD	1.41x0.72x1.05	396	M126	63	544
	T16UM	13.6	15	S4L2-SD	1.41x0.72x1.05	406	M126	65	630
	T11U	10.2	11.2	S3L2-SD	1.41x0.72x1.05	387	M126	65	530
	T16U	14.6	16	S4L2-SD	1.41x0.72x1.05	406	M126	65	554

NEW RANGE COMING SOON (20-165 kVA)

	D250U	227	250	P126TI	2.90x1.30x1.67	2410	M227	78	3260
	D300U	273	300	P126TI-II	3.16x1.34x1.59	2570	M228	75	3670
225-760 kW	D400U	364	400	P158LE	3.47x1.50x1.83	2910	M229	79	4090
	D500U	454	500	DP158LDS	3.47x1.50x1.82	3220	M229	80	4262
	D600U	546	600	DP180LB	3.47x1.63x2.16	3700	M230	82	5381
	D750U	691	760	DP222LC	3.47x1.63x2.18	4080	M230	78	5670


(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid



T2000U (Open version)

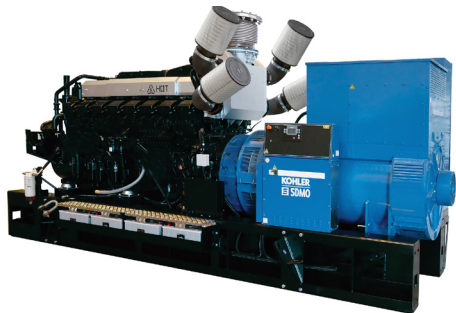

T2800 (Open version)

X-SERIES RANGE - 60 HZ

Power	Genset model	Power (kW)		Engine	Open version		Enclosure	Enclosed version	
		PRP ⁽¹⁾	ESP ⁽²⁾		Dimensions l x w x h (m)	Weight (kg) ⁽³⁾		dB(A) 7m	Weight (kg) ⁽³⁾
1000-2000 kW	T1200U	1091	1200	S12R-PTA-3	4.31x2.00x2.29	10100	M428SI*	80	12430
	T1600U	1454	1600	S12R-PTAA2	4.98x2.25x2.44	10870	ISO20SI*	89	16300
	T2000U	1818	2000	S16R-Y1PTAA2-1B	5.79x2.29x2.56	14698	ISO40SI*	84	23090

(1) PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

(2) ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

(3) Dry weight : without fuel & without cooling liquid

* exists in other enclosure/container with lower sound level

** Dimensions & weight without cooling system (separate aero cooler)

X -SERIES Enclosure	
Canopy	Dimensions l x w x h (m)
M125	1.48x0.76x1.03
M126	1.75x0.78x1.23
M137	2.10x0.94x1.28
M138	2.57x1.13x1.57
M139	3.59x1.15x1.78
M227	4.00x1.38x2.15
M228	4.48x1.41x2.43
M229	5.03x1.56x2.44
M230	5.03x1.69x2.66
M427SI	6.41x2.16x2.75
M428SI	6.80x2.16x3.93
Container	Dimensions l x w x h (m)
ISO20SI	6.06x2.44x2.90
ISO40SI	12.19x2.44x2.90
CPU40SI	12.19x2.44x2.90

X-SERIES Product naming		
KOHLER-SDM0	KPS	Engine
B...	B...	Baudouin engine
T...	KM...	Mitsubishi engine
D...	KH...	Doosan engine
GLOSSARY		
...U	60 Hz	
...M	Single phase	
...C	Clean Power Range	
...H	High speed (3000 RPM)	
...C3	Clean Power Range Stage IIIA	
...C5	Clean Power Range - Stage V	



M428SI (Soundproofed version)

KOHLER[®]
IN POWER. SINCE 1920.

KOHLER-SDMO.COM



© 2020 KOHLER CO.